

GenSPEED® 5000 Category 5e Backbone 25 Pair Cable

Features And Benefits

- Connects all systems of a multi-level distributed system to an intermediate system
- Sequential footage markings

Applications

- 1000 BASE-T (Gigabit Ethernet)
- 100/10 BASE-T
- 100 VG-AnyLAN
- 52/155 Mp/s ATM
- 4/16 Mb/s Token Ring
- T1
- Voice

Standard Compliances

- ANSI/TIA/EIA 568 B.2 (Category 5e)
- ANSI/ICEA S-90-661 (Category 5e)
- NEC/CEC Type CMR for Non-Plenum
- RoHS Compliant Directive 2002/95/EC



CONSTRUCTION

Conductors

- 25 pairs of 24 AWG solid bare annealed copper

Insulation

- Polyolefin

Color Code

- See Color Code Chart on page 86, except no bandmarking; only solid colors

Rip Cord

- Applied longitudinally under jacket

Jacket




- PVC

PHYSICAL DATA

	CMR (Non-Plenum)
Nominal Cable Diameter (in)	0.500
Nominal Cable Weight (lbs/1000ft)	125
Temperature Rating (°C)	
Installation:	0 to +60
Operation:	-20 to +75

PART NUMBERS

Standard packaging: 1000' Reel

Jacket Color	Reel	
	CMR (Non-Plenum)	
 Gray	2133269E	
 Blue	2133694E	
 White	2133781E	


Data subject to change without notice.

ELECTRICAL PERFORMANCE

Frequency MHz	Attenuation (max)	PSNEXT (min)	NEXT (min)	PSELFEXT (min)	Return Loss (min)
0.772	1.8	64.3	67.3	63.0	—
1	2.0	62.3	65.3	60.8	20.0
4	4.1	53.3	56.3	48.7	23.0
8	5.8	48.3	51.3	42.7	24.5
10	6.5	47.3	50.3	40.8	25.0
16	8.2	44.3	47.3	36.7	25.0
20	9.3	42.3	45.3	34.7	25.0
25	10.4	41.3	44.3	32.8	24.3
31.25	11.7	39.3	42.3	30.9	23.6
62.5	17.0	35.3	38.3	24.8	21.5
100	22.0	32.3	35.3	20.8	20.1

Note: Values are expressed in dB per 100m (328 ft.) length.

**GenSPEED® 5000 CATEGORY 5e BACKBONE
25 PAIR CROSS-SECTION**

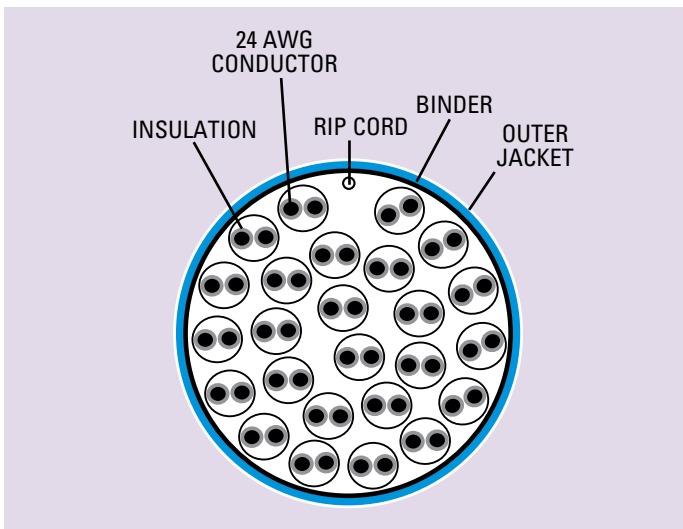

ELECTRICAL CHARACTERISTICS

DC Resistance (max) Ohms/100m (328ft) @ 20°C	9.38
Mutual Capacitance (nom) pF/ft @ 1 KHz	14
Delay Skew (max) ns/100m	45
Propagation Delay (max) ns @ 100 MHz	538
Nom. Velocity of Propagation (NVP) % Speed of Light	68
Characteristic Impedance Frequency (f):	Ohms 100 ± 15