

Central Office Cables

6

General Cable is a highly recognized manufacturer of a comprehensive line of Central Office cable. As a primary national supplier, our top-quality product line includes cables with the ability to run both analog and digital services from 75 Ohm DS3/4 interconnect cable and switchboard cable to ALVYN terminating cable and two-way digital transmission cable. General Cable's preferred central office cables are engineered for T1, DS1, DS1C, DS2 and other broadband services.

Designed to provide the optimum in performance, the products' transmission, physical and mechanical characteristics are committed to the highest standards of product quality. All of these cables provide enhanced crosstalk and attenuation performance for customers who need broadband solutions. In addition, Telcordia test reports are available upon request for the terminating cable line of products.

Index	Page
734D Series for DS-3 and DS-4 75 Ohm Cross-Connect Cable	60
735A/C Series for DS-3 and DS-4 75 Ohm Cross-Connect Cable	61
Switchboard Cable	62
Shielded Switchboard Cable	63
100 Ohm Individually Braided Shielded Twisted Pair Cable	64
Dual Insulated Dual Shielded Flexible Terminating Cable	65
Tight Twisted Pair Digital Terminating Cable	66-67
Dual Insulated ALVYN Sheathed Terminating Cable	68
Foam Skin ALVYN Riser	69

734D Series for DS-3 and DS-4

75 Ohm Cross-Connect Cable

Product Construction

Conductor:

- 20 AWG silver-plated copper

Insulation:

- Gas-injected foamed PE (O.D.: 0.146")

Shield:

- Foil: Aluminum
- Braid: 85% tinned copper

Jacket:

- Flame-retardant PVC

Temperature/Voltage Rating

- 75° C/300 V

Packaging

- 1000' wood reels

Applications

- Interconnect and cross-connecting central offices
- Plenum cable is also available upon request

Compliances

- UL and c(UL) Type CMR



CMR (Non-Plenum)

PRODUCT NUMBER	CONDUCTORS	HFA PRODUCT NUMBER
7340201	1	CO20C0012410
7340201T	1 + 22 AWG Tracer	ZO20C0022010
7340202	2	CO20C0022410
7340203	3	CO20C0032410
7340206	6	CO20C0061110
7340208	8	CO20C0082410
7340209	9	CO20C0092410
7340212	12	CO20C0122410
7340216	16	CO20C0162410

Data subject to change without notice.

ELECTRICAL CHARACTERISTICS

SRL 5-90 MHz (dB MIN.)	DC RESISTANCE (OHMS/KFT NOM.)	SHIELD DC RESISTANCE (OHMS/KFT NOM.)	NOMINAL CAPACITANCE (pF/ft)	NVP %
30	10.1	5.6	17.3	80

ATTENUATION (NOMINAL)

MHz/SIGNAL	dB/100ft	dB/100m
0.772	0.24	0.79
CEPT1	0.25	0.82
CEPT2	0.50	1.64
5	0.54	1.77
10	0.75	2.46
CEPT3	0.98	3.21
DS3	1.15	3.77
STS1	1.21	3.97
44.736	1.65	5.41
50	1.70	5.58
CEPT4	2.01	6.59
STS3	2.19	7.18
100	2.69	8.82
DS4	2.94	9.64
200	3.58	11.74

Data subject to change without notice.

735A/C Series for DS-3 and DS-4

75 Ohm Cross-Connect Cable



CMR (Non-Plenum)

PRODUCT NUMBER	CONDUCTORS	HFA PRODUCT NUMBER
7356201	1	CO26C0012010
7356201T	1 + 22 AWG Tracer	ZO26C0022010
7356202	2	CO26C0022010
7356203	3	CO26C0032010
7356206	6	CO26C0062010
7356208	8	CO26C0082010
7356209	9	CO26C0092010
7356212	12	CO26C0122010
7356216	16	CO26C0162010
7356224	24	NOT SET UP

Data subject to change without notice.

Product Construction

Conductor:

- 26 AWG silver-plated copper

Insulation:

- Gas-injected foamed PE (O.D.: 0.077")

Shield:

- Foil: Aluminum
- Braid: 95% tinned copper

Jacket:

- Flame-retardant PVC

Temperature/Voltage Rating

- 75° C/300V

Packaging:

- 1000' reels

Applications

- Interconnect and cross-connecting central offices

Compliances

- UL and c(UL) Type CMR

735A ELECTRICAL CHARACTERISTICS

SRL 5-90 MHz (dB MIN.)	DC RESISTANCE (OHMS/KFT MAX.)	SHIELD DC RESISTANCE (OHMS/KFT NOM.)	NOMINAL CAPACITANCE (pF/ft)	NVP %
30	40.0	2.70	17.0	83

735C ELECTRICAL CHARACTERISTICS

SRL 5-150 MHz (dB MIN.)	DC RESISTANCE (OHMS/KFT MAX.)	SHIELD DC RESISTANCE (OHMS/KFT NOM.)	NOMINAL CAPACITANCE (pF/ft)	NVP %
35	40.0	2.70	17.0	83

ATTENUATION (MAXIMUM)

MHz/SIGNAL	dB/100ft
0.772	0.50
CEPT1	0.54
CEPT2	1.02
5	1.10
10	1.50
CEPT3	2.02
DS3	2.30
STS1	2.56
44.736	3.28
50	3.40
CEPT4	4.12
STS3	4.36
100	4.99
DS4	5.84
200	7.08

Data subject to change without notice.



Switchboard Cable

Spec. 4753 • Type CMR • TIW Series

Product Construction

Conductors:

- 24 AWG solid tinned annealed copper

Insulation:

- Flame-retardant semi-rigid PVC
- Insulation thickness = 0.006"

Pairing:

- Three twists per foot minimum

Color Code:

- See Color Code Chart on page 86

Rip Cord:

- Applied longitudinally under jacket

Jacket:

- Gray, tough, flame-retardant PVC

Packaging


- 1000' reel (RL)
- Bulk reels are available upon request

Applications

- Voice
- T1 Fractional
- Category 2 applications
- Basic rate ISDN

Compliances

- ANSI/ICEA S-80-576
- UL and c(UL) Type CMR

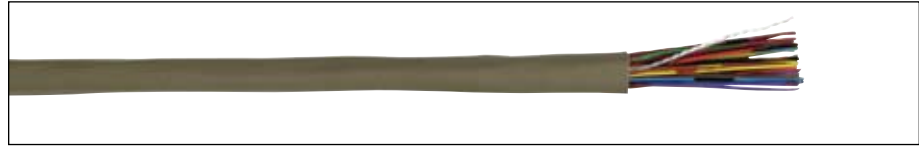


PRODUCT NUMBER	PAIRS	O.D. (INCHES)	WEIGHT (LBS/KFT)
7023039	3	0.13	13
2114621	4	0.16	16
6970073	12	0.24	42
6970065	25	0.36	84
7023021	32	0.37	106
6970123	50	0.46	168
7002975	75	0.56	247

Data subject to change without notice.

Note: Non-stock items may be subject to minimum order quantities.

Electrical Characteristics

	24 AWG	
	3-6 pr	over 6 pr
DC Resistance (max) Ohms/1000ft @ 20°C	31.5	31.5
Mutual Capacitance (nom) pF/ft @ 1kHz	19	22
Attenuation (nom) dB/1000ft @ 0.772 MHz dB/1000ft @ 4.224 MHz	6.2 16	7.1 18
Characteristic Impedance Ohms @ 1 MHz (nom)	100 ± 15	100 ± 20

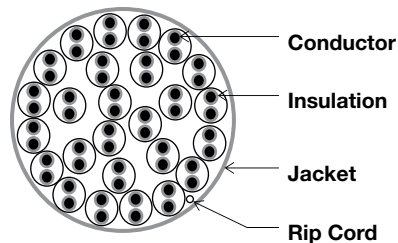

Shielded Switchboard Cable

Spec. 4754 • Type CMR




PRODUCT NUMBER	PAIRS	O.D. (INCHES)	WEIGHT (LBS/KFT)
2114628	25	0.350	90
2114627	32	0.380	120

Data subject to change without notice.

Electrical Characteristics

	24 AWG
DC Resistance (max) Ohms/1000ft @ 20°C	31.5
Coaxial Capacitance (max) microfarads/kft @ 23°C	22
Attenuation (nom) dB/1000ft @ 0.772 MHz dB/1000ft @ 4.224 MHz	7.1 18
Characteristic Impedance Ohms @ 1 MHz (nom)	100 ± 20

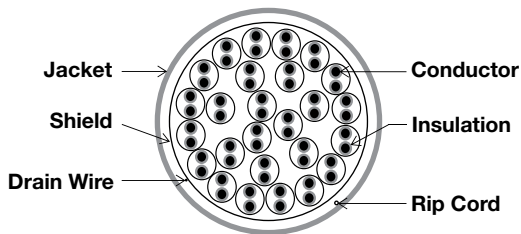

Product Construction

Conductors:

- 24 AWG solid tinned annealed copper

Insulation:

- Flame-retardant semi-rigid PVC
- Insulation thickness = 0.006"

Pairing:

- Three twists per foot minimum

Color Code:

- See Color Code Chart on page 86

Rip Cord:

- Applied longitudinally under jacket

Shield:

- Polyester-backed aluminum foil shield
- Aluminum facing in

Drain Wire:

- 24 AWG solid tinned copper drain wire is placed on aluminum side

Jacket:

- Tough, gray, flame-retardant PVC

Packaging

- 1000' reel (RL)
- Bulk reels are available upon request

Applications

- Voice
- T1 Fractional
- Category 2 applications
- Basic rate ISDN

Compliances

- ANSI/ICEA S-80-576
- UL and c(UL) Type CMR



100 Ohm Individually Braided Shielded Twisted Pair Cable

Terminating Cable for Digital Transmission • Spec. 4162 • Type CMR/CM

Product Construction

Conductors:

- 22 AWG solid tinned annealed copper

Insulation:

- High-density polyethylene with a layer of flame-retardant PVC overall
- Primary insulation, nominal O.D. = 0.051"
- Secondary insulation, nominal O.D. = 0.072"

Drain Wire:

- 22 AWG solid tinned annealed copper

Shield:

- 34 AWG tinned copper braid 90% coverage

Pair Jacket:

- Flame-retardant PVC jacket over each braid shielded twisted pair

Color Code:

- Pair jackets are color-coded by use of jacket printing
- Marking or printing will correspond with the colors of the insulated pairs (e.g., white/blue printed on the pair jacket indicates the insulation colors of the pairs enclosed)

Jacket:

- Flame-retardant PVC
- Sequential footage markings

Packaging

- 500' reel (RL)
- Bulk reels are available upon request

Applications

- T1/DS1
- Suitable for use in terminating high-frequency lines to carrier equipment in central offices

Compliances

- 1 pair: UL and c(UL) Type CM
- 2 pair through 12 pair: UL and c(UL) Type CMR



PRODUCT NUMBER	PAIRS	COLOR CODE	JACKET COLOR	O.D. (INCHES)	WEIGHT (LBS/KFT)
2117037	1	W/BL	Orange	0.18	26
2117046	1	BK/O	Gray	0.18	26
2117047	1	R/G	Gray	0.18	26
2117048	1	W/BL	Red	0.18	26
7056898	1	W/BL	Gray	0.18	26
7056906	1	W/O	Gray	0.18	26
7056880	2	See Chart	Gray	0.46	75
7056930	5	See Chart	Gray	0.57	160
7056948	8	See Chart	Gray	0.72	244
7056955	10	See Chart	Gray	0.80	302
7056963	12	See Chart	Gray	0.87	355


Data subject to change without notice.

Electrical Characteristics

	22 AWG	Frequency	Attenuation dB/1000ft	NEXT dB/1000ft	FEXT dB/1000ft
DC Resistance (max) Ohms/1000ft @ 20°C	18	.100 MHz	2.2	97	109
Resistance Unbalanced (max) (of a pair) @ 20°C	5	.772 MHz	6.1	93	94
Shield Resistance (nom) Ohms @ 1000ft	3.3	1.000 MHz	7.0	88	92
Mutual Capacitance (max) pF/ft @ 1 kHz	19	1.600 MHz	9.1	85	90
Impedance Ohms/772 kHz	100 ± 5	3.150 MHz	13.2	82	88
		6.300 MHz	19.1	80	83
		10.000 MHz	25.0	72	71

Color Code Chart

PAIR NO.	COLOR CODE
1	White & Blue
2	White & Orange
3	White & Green
4	White & Brown
5	White & Slate
6	Red & Blue
7	Red & Orange
8	Red & Green
9	Red & Brown
10	Red & Slate
11	Black & Blue
12	Black & Orange

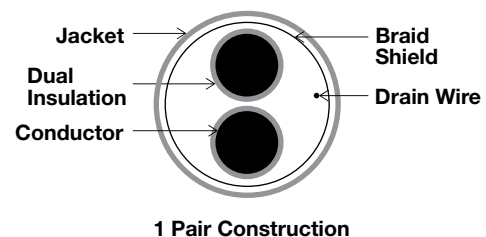

Dual Insulated Dual Shielded Flexible Terminating Cable

Spec. 4502 • Type CMR • 600C Series



PRODUCT NUMBER	PAIRS	JACKET COLOR	PKG	O.D. (INCHES)	WEIGHT (LBS/KFT)
2117005	6	DK. Gray	1000'	0.37	66
2117039	6	L.O. Gray	Bulk	0.37	66
2117006	12	DK. Gray	Bulk	0.48	108
2117040	12	L.O. Gray	Bulk	0.48	108
2117007	16	DK. Gray	1000'	0.50	134
2117041	16	L.O. Gray	Bulk	0.50	134
2117051	20	L.O. Gray	1000'	0.55	160
2117008	25	DK. Gray	1000'	0.63	191
2117042	25	L.O. Gray	Bulk	0.63	191
2117045	28	L.O. Gray	Bulk	0.64	208
2117003	30	DK. Gray	1000'	0.65	222
2117043	30	L.O. Gray	Bulk	0.65	222
2117009	32	DK. Gray	1000'	0.68	234
2117044	32	L.O. Gray	Bulk	0.68	234
2117020	50	DK. Gray	1000'	0.82	343
2117056	50	L.O. Gray	Bulk	0.82	343
2117010	75	DK. Gray	1000'	0.95	489

Data subject to change without notice.

Electrical Characteristics

	22 AWG
DC Resistance (max) Ohms/1000ft @ 20°C	18
Insulation Resistance (min) Megohm - 1000ft @ 23°C	5000
Mutual Capacitance (nom) nF/1000ft @ 1 kHz	20.1
Attenuation (nom) dB/1000ft @ 1 MHz dB/1000ft @ 1.6 MHz dB/1000ft @ 4.0 MHz	5.0 6.6 11.3
PSNEXT dB/1000ft @ 0.772 MHz dB/1000ft @ 1.600 MHz dB/1000ft @ 3.150 MHz dB/1000ft @ 6.300 MHz	42 38 33 29
Characteristic Impedance (nom) Ohms @ 1 MHz	100 ± 15

Product Construction

Conductors:

- 22 AWG solid tinned copper conductors

Insulation:

- Inner layer of polyethylene covered by an outer layer of flame-retardant PVC
- Primary insulation, nominal O.D. = 0.042"
- Secondary insulation, nominal O.D. = 0.050"

Color Code:

- See Color Code Chart on page 86

Core Wrap:

- Non-hygroscopic dielectric tape applied longitudinally with an overlap

Shield:

- Two polyester-backed aluminum foil shields

Drain Wire:

- 22 AWG solid tinned copper drain wire is placed between the two shields

Rip Cord:

- Applied longitudinally under jacket

Jacket:

- Flame-retardant PVC
- Sequential footage markings

Packaging


- 1000' reel (RL)
- Bulk reels are available upon request

Applications

- T1/DS1
- DS1C
- DS2
- For interconnecting (DSI) digital equipment to digital cross-connects (DSX) and computers

Compliances

- Telcordia (Bellcore) analyzed the General Cable 4502 Series - Type 600C Family of Central Office Cables to the criteria in Telcordia GR-137-CORE. Copies of the analysis report are available from General Cable upon request.
- UL and c(UL) Type CMR

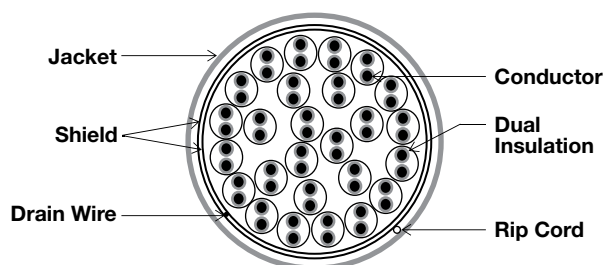

Tight Twisted Pair Digital Terminating Cable

Spec. 4129 • Type CMR • 1249C Series

26 AWG Dual Insulated/Shielded/Jacketed

Product Construction

Conductors:

- 26 AWG solid tinned annealed copper

Insulation:

- Inner layer of polyethylene, outer layer of PVC
- Primary insulation, nominal O.D. = 0.022"
- Secondary insulation, nominal O.D. = 0.029"

Color Code:

- See chart below

Inner Jacket:

- Flame-retardant gray PVC

Shields:

- Two polyester-backed aluminum foil shields

Drain Wire:

- 24 AWG solid tinned copper is placed between the two shields

Rip Cord:

- Applied longitudinally under jacket

Jacket:

- Flame-retardant gray PVC

Packaging

- 1000' reel (RL)
- Bulk reels are available upon request

Applications

- T1/DS1
- DS1C
- DS2

Compliances

- Telcordia (Bellcore) analyzed the General Cable 4129 Series - Type 1249C Family of Central Office Cables to the criteria in Telcordia GR-137-CORE. Copies of the analysis report are available from General Cable upon request.
- UL and c(UL) Type CMR

Features

- Nominal 100 Ohm impedance
- Dual-shielded digital terminating cable is designed for switching and transmission equipment cabling for telephone central office
- Shielding from EMI
- Short twist length for better crosstalk performance




PRODUCT NUMBER	PAIRS	O.D. (INCHES)	WEIGHT (LBS/KFT)
7412920	20	0.41	72
7412928	28	0.44	91

Data subject to change without notice.
Other pair counts available as special order.

Electrical Characteristics

26 AWG		
DC Resistance (max)	Ohms/100m (328ft) @ 20°C	13.7
Mutual Capacitance (nom)	nF/100m @ 1 kHz	5.25
Conductor Resistance		5%
Unbalance (max)		
Characteristic Impedance		Ohms
Frequency (f):	1.0 MHz	100 ± 15
Capacitance Unbalance		
pF/100m	Pr to Pr	52.5 (max)
	Pr to Ground	330 (max)
Attenuation (nom)		dB/100m
Frequency (f):	0.772 MHz	2.1
	1.024 MHz	2.5
	1.576 MHz	3.0
	3.156 MHz	4.3
	4.224 MHz	4.9

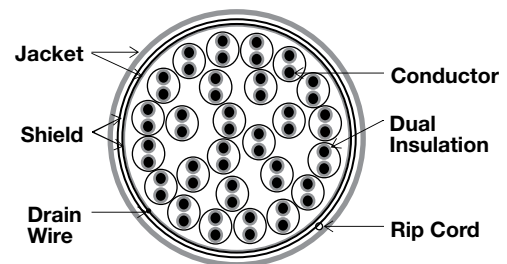

Color Code Chart

PAIR NO.	TIP	RING	PAIR NO.	TIP	RING
1	White	Blue	14	Black	Brown
2	White	Orange	15	Black	Slate
3	White	Green	16	Yellow	Blue
4	White	Brown	17	Yellow	Orange
5	White	Slate	18	Yellow	Green
6	Red	Blue	19	Yellow	Brown
7	Red	Orange	20	Yellow	Slate
8	Red	Green	21	Violet	Blue
9	Red	Brown	22	Violet	Orange
10	Red	Slate	23	Violet	Green
11	Black	Blue	24	Violet	Brown
12	Black	Orange	25	Violet	Slate
13	Black	Green			

Tight Twisted Pair Digital Terminating Cable

Spec. 7271 • Type CMR • 1161A Series

24 AWG Shielded/Extended Frequency



PRODUCT NUMBER	PAIRS	O.D. (INCHES)	WEIGHT (LBS/KFT)
7271.01224.S1R	12	0.35	60
7271.02524.S1R	25	0.48	109
7271.02824.S1R	28	0.51	132


Data subject to change without notice.

Electrical Characteristics

	24 AWG	Frequency	Attenuation dB/100m	NEXT dB
DC Resistance (max) Ohms/100m (328ft) @ 20°C	9.38	0.772 MHz	1.9	56
Mutual Capacitance (max) pF/ft @ 1 kHz	17	1 MHz	2.2	55
Insulation Resistance (min) (mohms - 1000')	500	4 MHz	4.1	45
Characteristic Impedance Frequency (f): 1.0 MHz	Ohms 100 ± 15	8 MHz	5.0	41
Capacitance Unbalance pF/100m	Pr to Pr 70 (max) Pr to Ground 330 (max)	10 MHz	5.7	39
		16 MHz	7.2	35

Color Code Chart

PAIR NO.	TIP	RING	PAIR NO.	TIP	RING
1	White	Blue	14	Black	Brown
2	White	Orange	15	Black	Slate
3	White	Green	16	Yellow	Blue
4	White	Brown	17	Yellow	Orange
5	White	Slate	18	Yellow	Green
6	Red	Blue	19	Yellow	Brown
7	Red	Orange	20	Yellow	Slate
8	Red	Green	21	Violet	Blue
9	Red	Brown	22	Violet	Orange
10	Red	Slate	23	Violet	Green
11	Black	Blue	24	Violet	Brown
12	Black	Orange	25	Violet	Slate
13	Black	Green			

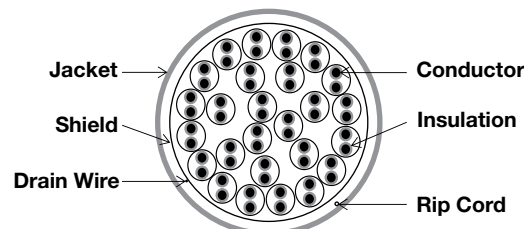

Product Construction

Conductors

- 24 AWG solid tinned annealed copper

Insulation:

- High-density polyethylene, nom. = 0.036"

Pairing:

- Tight pair lays

Color Code:

- See chart below

Shield:

- Polyester-backed aluminum foil shield

Drain Wire:

- 24 AWG solid tinned copper

Rip Cord:

- Applied longitudinally under jacket

Jacket:

- Flame-retardant gray PVC

Packaging

- 1000' reel (RL)
- Bulk reels are available upon request

Applications

- T1/DS1
- DS1C
- DS2
- 10 BASE-T
- Shielded digital terminating cable is designed for switching and transmission equipment cabling for telephone central office

Compliances

- TIA/EIA 568 B.2 (Category 3)
- UL and c(UL) Type CMR

Features

- Nominal 100 Ohm impedance
- Shielding from EMI
- Short twist length for better crosstalk performance



Dual Insulated ALVYN Sheathed Terminating Cable

Terminating Cable for Voice and Digital Transmission • Spec. 4513 • Type CMR

Bell System Type: ABAM (22 AWG) • ABMM (24 AWG)

Product Construction

Conductors:

- 22 and 24 AWG solid tinned copper conductors

Insulation:

- Inner layer of polyethylene covered by an outer layer of flame-retardant PVC
- 22 AWG
 - Primary insulation, nominal O.D. = 0.039"
 - Secondary insulation, nominal O.D. = 0.048"
- 24 AWG
 - Primary insulation, nominal O.D. = 0.032"
 - Secondary insulation, nominal O.D. = 0.039"

Color Code:

- See Color Code Chart on page 86

Core Wrap:

- Polyester core wrap

Shield:

- 0.008" corrugated polymer-coated aluminum bonded to jacket

Jacket:

- Dark gray flame-retardant PVC
- Sequential footage markings

Packaging

- 1000' reel (RL)
- Bulk reels are available upon request

Applications

- Voice
- T1
- Suitable for voice and carrier transmission between the outside plant entrance cables to station protector frames and to carrier equipment bays and for use in riser applications

Compliances

- REA PE-87
- GTS-8510
- Bellcore Specification TR-TSY-000141
- TIA/EIA 568 B.2 (Category 3)
- UL and c(UL) Type CMR




PRODUCT NUMBER	PAIRS	AWG	O.D. (INCHES)	WEIGHT (LBS/KFT)
7043938	6	22	0.45	80
7043946	12	22	0.50	120
7043953	16	22	0.58	150
7043961	25	22	0.67	230
2110020	28	22	0.74	250
7044001	30	22	0.75	265
7044118	50	22	0.93	410
7043979	75	22	1.10	570
7043987	100	22	1.20	730
7043995	200	22	1.60	1350
2110021	300	22	1.90	1970
2110022	600	22	2.80	2590
2110013	25	24	0.56	150
2110014	50	24	0.74	255
2110015	100	24	1.00	460
2110016	200	24	1.30	860
2110017	300	24	1.50	1240
2110023	400	24	1.80	1750
2110018	600	24	2.20	2440
2110019	900	24	2.70	3190

Data subject to change without notice.

Electrical Characteristics

	22 AWG 6-600 pr.	24 AWG 25-900 pr.	Frequency	Attenuation dB/100m (max)	NEXT dB
DC Resistance (max) Ohms/1000ft @ 20°C	17.2	27.3	0.772 MHz	2.2	43
Insulation Resistance (min) Megohm - 1000 @ 23°C	5000	5000	1 MHz	2.6	41
Mutual Capacitance (nom) nF/mile @ 1 kHz pF/ft @ 1 kHz	83 16	83 16	4 MHz	5.6	32
Characteristic Impedance (nom) Ohms @ 1 MHz	100	100	8 MHz	8.5	28
			10 MHz	9.7	26
			16 MHz	13.1	23

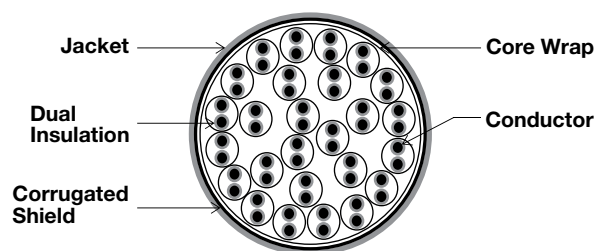

Foam Skin ALVYN Riser

Riser Cable For Voice and Digital Transmission
 Spec. 2507 • Type CMR • Bell System Type: ARMM (24 AWG) • ARTM (26 AWG)



PRODUCT NUMBER	PAIRS	AWG	O.D. (INCHES)	WEIGHT (LBS/KFT)	STANDARD LENGTH (FT)
2019000	25	24	0.53	142	5000
2019001	50	24	0.66	234	5000
7507601	100	24	0.85	410	5000
7507619	200	24	1.20	760	2500
7507627	300	24	1.40	1105	2500
7507635	400	24	1.50	1445	2500
7507643	600	24	1.90	2150	1250
7507650	900	24	2.20	3170	1250
7507668	1200	24	2.60	4185	1000
2019005	50	26	0.56	165	5000
2019003	100	26	0.71	280	5000
2019004	200	26	0.92	495	5000
7507544	300	26	1.10	710	3000
7507551	400	26	1.20	930	3000
7507569	600	26	1.50	1365	1000
7507577	900	26	1.80	2025	1000
7507536	1200	26	2.00	2665	1000

Data subject to change without notice.

Note: Non-stock items may be subject to minimum order quantities.

Electrical Characteristics

	24 AWG	26 AWG	Frequency	Attenuation dB/100m (max)	NEXT dB
DC Resistance (max) Ohms/1000ft @ 20°C	27.3	43.9	0.772 MHz	2.2	43
			1 MHz	2.6	41
			4 MHz	5.6	32
			8 MHz	8.5	28
Mutual Capacitance (nom) nF/mile @ 1 kHz	83	83	10 MHz	9.7	26
			16 MHz	13.1	23

Product Construction

Conductors:

- 24 and 26 AWG solid bare annealed copper

Insulation:

- Dual insulation consisting of an inner layer of foamed polyolefin surrounded by a solid PVC skin
- 24 AWG
 - Primary insulation, nominal O.D. = 0.031"
 - Secondary insulation, nominal O.D. = 0.035"
- 26 AWG
 - Primary insulation, nominal O.D. = 0.023"
 - Secondary insulation, nominal O.D. = 0.027"

Color Code:

- See Color Code Chart on page 86, except no bandmarking, only solid colors

Core Wrap:

- Non-hygroscopic dielectric tape applied longitudinally with an overlap

Shield:

- 0.008" corrugated, adhesive-coated aluminum bonded to jacket

Jacket:

- Gray flame-retardant PVC jacket bonded to the coated aluminum

Packaging

- Standard lengths are shipped on returnable steel reels or on non-returnable wood reels when requested
- ARAM (22 AWG) is available upon request

Applications

- Intended primarily for placement in vertical risers in buildings and may be used in general horizontal applications
- Designed for voice and carrier transmission between the station protector frames and other equipment terminals

Compliances

- TIA/EIA 568 B.2 (Category 3 for 24 AWG only)
- Bellcore Specification TR-TSY-000111
- UL and c(UL) Type CMR

