

MegaLine® D1-20 SF/U flex


S₂P₀A₁C₂E₃

Type: KS-02YS(ST+C)H 4x2xAWG 26/7



Construction:

- Conductor: bare stranded copper wire, AWG 26/7
- Insulation: cellular-PE, core-Ø: max. 1.0 mm
- Twisting element: Pair
- Twisting: 4 pairs
- Overall screen: aluminum-bonded polyester tape and tinned copper wire braid
- Outer sheath: halogen-free, flame retardend compound

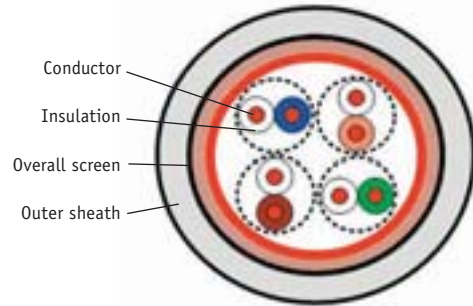

Printing outer sheath:

KERPEN MegaLine® D1-20 SF/U flex 4P H
SPACE CODE 20123
"Production lot code" "Meter marking"

Colour code: whbu/bu, whor/or, whgn/gn, whbn/bn;
Colour outer sheath: grey, RAL 7035;
yellow, RAL 1021; green, RAL 6018;
blue, RAL 5015; red, RAL 3000

Fire behaviour:

Flame retardance: acc. to IEC 60332-1-2
Halogen acid gas emission: acc. to IEC 60754-2
Smoke density: acc. to IEC 61034
Calorific value (MJ/m): 0.30 (approx.)

S	1	2	3	4	5
	IEC 60332-2-2	IEC-60332-1-2	IEC-60332-3-24	EFP Grade 1	EFP Grade 2

Security (Fire behaviour)

Performance:

Better than category 5 acc. EN 50288 and IEC 61156
very good screening characteristics
Bandwidth 200 MHz

P	1	2	3	4	5
	> class E > 250 MHz	> class E _A > 500 MHz	> class F > 600 MHz	> class F _A > 1,000 MHz	> class "G" > 1,200 MHz

Performance (Cabling class, bandwidth)

Applications:

Connecting cable and patch cord for generic cabling systems acc. ISO/IEC 11801 and EN 50173 (2. edition). Ideal for all applications of class D up to 1 GbE acc. IEEE 802.3 ab, VoIP, PoE

A	1	2	3	4	5
	> 100 MbE	> 1 GbE	up to 10 GbE	> 10 GbE	> 10 GbE TV

Application (Ethernet, TV)

Mechanical characteristics:

Bending radius:
during operation: min. 5 x overall diameter
Tensile strength: 60 (max.)

C	1	2	3	4	5
	AWG 27	AWG 26/25	AWG 24	AWG 23	AWG 22

Construction (Conductor size, Tensile strength)

Electromagnetic behaviour:

Transfer impedance at 10 MHz (mOhm/m):
10 (nominal value)
Screening attenuation up to 1,000 MHz (dB):
50 (nominal value)
Coupling attenuation up to 1,000 MHz (dB):
65 (nominal value)

E	1	2	3	4	5
	> 40 dB	> 50 dB	> 60 dB	> 70 dB	> 80 dB

EMC (Coupling attenuation)

Electrical characteristics at 20°C:

- DC resistance (Ohm/km): 145 (max.)
- Insulation resistance (Gohm x km): 500 (min.)
- Mutual capacitance (pF/m): 47 (approx.)
- Signal velocity (c): 0.69 (approx.)
- Propagation delay (ns/100m): 485 (approx.)
- Skew at 100 MHz (ns/100m): 15 (approx.)
- Characteristic impedance at 100 MHz (Ohm): 100 ± 5
- Test voltage Ueff (V): 1,000
- Operating voltage Ueff (V): 125 (max.)

Frequency MHz	Attenuation dB/10m		NEXT dB		PS-NEXT dB		ACR dB@10m		PS-ACR dB@10m		EL-FEXT dB@10m		PS-ELFEXT dB@10m		RL dB	
	typ.	Cat.5 max.*	typ.	Cat.5 min.*	typ.	Cat.5 min.*	typ.	Cat.5 min.*	typ.	Cat.5 min.*	typ.	Cat.5 min.*	typ.	Cat.5 min.*	typ.	Cat.5 min.*
1	0.24	0.32	76	65	73	62	76	65	73	62	91	64	88	61	24.9	-
4	0.44	0.6	71	56	68	53	70	56	67	53	76	52	73	49	29.8	23
10	0.8	0.95	64	50	61	47	63	49	60	47	68	44	65	41	38.2	25
16	1.01	1.21	60	47	57	44	59	46	56	44	64	40	61	37	39.3	25
31.25	1.44	1.71	56	43	53	40	54	41	51	40	58	34	55	31	36.7	23.6
62.5	2.07	2.48	52	38	49	35	50	36	47	35	52	28	49	25	35	21.5
100	2.66	3.2	48	35	45	32	45	32	42	32	47	24	44	21	29.9	20.1
155	3.26	-	45	-	42	-	42	-	39	-	42	-	39	-	26.2	-
200	3.86	-	42	-	39	-	39	-	36	-	37	-	34	-	23.5	-

* EN 50288-2-2/IEC 61156-6


Chemical characteristics:

Free of hazardous substances acc. to RoHS 2002/95/EG

Certificates and Approvals:

Link performance: KERPEN ELine™ systems and further commercial cabling systems

Inspection certificate: acc. to DIN 55350-18-4.2.1 respectively EN 10204

In agreement to LVD (73/23/EEC): 

Thermal characteristics:

Temperature range for fixed installation: -20°C up to + 60°C

Temperature range for mobile operation: 0°C up to + 50°C

Article number	Size	Overall diameter mm	Weight kg/km	Copper number kg/km	Colour sheat
7KS50013	4P	5.3 (approx.)	32 (approx.)	21	grey RAL 7035
7KS50014	4P	5.3 (approx.)	32 (approx.)	21	yellow, RAL 1021
7KS50015	4P	5.3 (approx.)	32 (approx.)	21	green, RAL 6018
7KS50016	4P	5.3 (approx.)	32 (approx.)	21	blue, RAL 5015
7KS50017	4P	5.3 (approx.)	32 (approx.)	21	red, RAL 3000

Package: Drum 1,000 m