


## The ELine™ FIXUM system

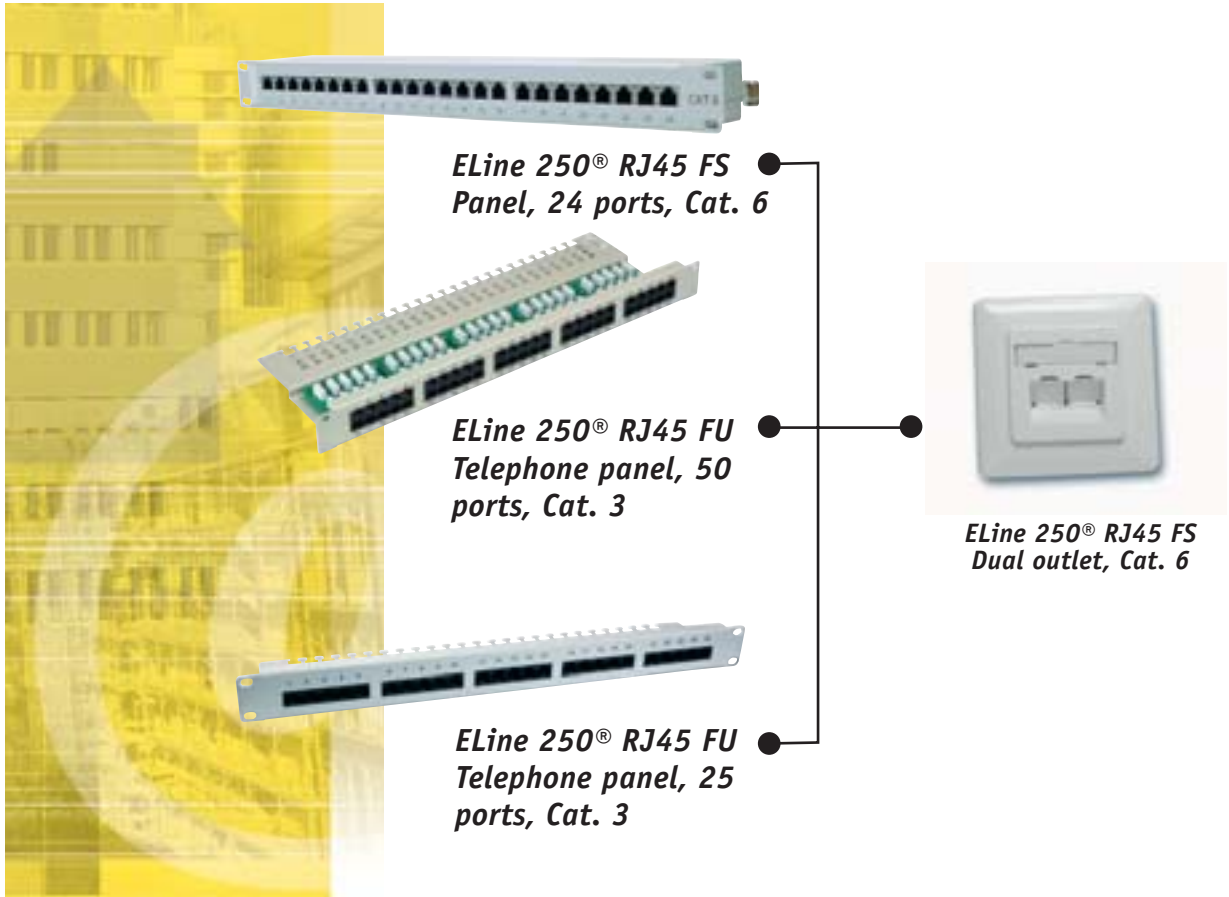

## ELine 250® RJ45 FS Cat. 6 LSA solution

ELine 250® RJ45 FS offers good performance with reserves exceeding the Cat. 6 specification in the channel and in the permanent link. In addition, the components are manufactured according to the well-known LSA method, making them extremely easy to mount.

## LSA products



**ELine 250® RJ45 FIXUM panel, 24 ports, shielded**  
19", 1 U 483 x 44 x 98 mm (WxHxD)

**ELine 250® RJ45 FIXUM dual outlet, shielded**  
80 x 80 mm

### Product description:

- 24-port RJ45 panel, shielded, Cat. 6
- Rear connection via 8-pole LSA punch-down connection strips
- Suitable for solid conductors AWG 22-26
- Short assembly time
- Suitable for mounting in 19" cabinets
- Colour: pure white, RAL 7035

### Product description:

- Outlet for cable duct, surface, concealed and floor-box mounting
- Two RJ45 slots, Cat. 6
- Rear LSA punch-down connections suitable for solid conductors AWG 22-26
- Colour coding according to EIA / TIA 568 A + B
- Short assembly time

Article number: 9ZE70001  
Pcs. per packing unit: 1

Cable guide right/left	Cable guide right/left
Article number: 9ZE70002 (RAL 9010)	Article number: 9ZE70005 (RAL 1013)
Pcs. per packing unit: 1	Pcs. per packing unit: 1
Cable guide top/bottom	Cable guide top/bottom
Article number: 9ZE70006 (RAL 9010)	Article number: 9ZE70007 (RAL 1013)
Pcs. per packing unit: 1	Pcs. per packing unit: 1



**ELine™ FIXUM telephone patch panel, 50 ports**  
19", 1 U 483 x 44 x 92 mm (WxHxD)

**ELine™ FIXUM telephone patch panel, 25 ports**  
19", 1 U 483 x 44 x 92 mm (WxHxD)

### Product description:

- Suitable for ISDN applications
- Connections: front: 50 x RJ45 jacks, unshielded
- Rear: 4 x 50 LSA punch-down connections
- Connection method: punch-down connections suitable for solid conductors up to AWG 22
- Assignment: pin 3, 4, 5, 6
- Colour: light grey, RAL 7035

### Product description:

- Suitable for ISDN applications
- Connections: front: 25 x RJ45 jacks, unshielded
- Rear: 4 x 25 LSA punch-down connections
- Connection method: punch-down connections suitable for solid conductors up to AWG 22
- Assignment: pin 3, 4, 5, 6
- Colour: light grey, RAL 7035

Article number: 9ZE70004  
Pcs. per packing unit: 1

Article number: 9ZE70003  
Pcs. per packing unit: 1