


F/UTP Category 5 & 3

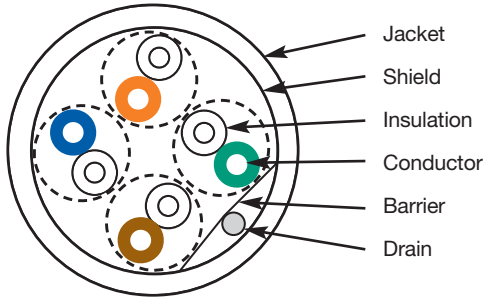

Category 5 F/UTP

- **Category 5 cable** in a foil twisted pair design, or overall shielded
- **10 dB Minimum ACR @ 100 MHz** – Proven support for 155 Mbps ATM, 100 Mbps Fast Ethernet, 100 Mbps TP-PMD, 100VG-AnyLAN, 550 MHz Broadband Video and standards under development such as ATM at 622 Mbps
- **.30 ns/meter Maximum Skew** – Tightly controlled propagation delay

Mohawk Part No.	Cable Type	Dielectric Type	Jacket Type Diameter		Weight		Listings
			inch	mm	lbs/M'	kg/km	

Category 5

M54783 Non-Plenum	4 PAIR 24 AWG F/UTP	Thermoplastic	Gray PVC .240	6.1	32	48	C(UL)US CMR
M55082 Plenum	4 PAIR 24 AWG F/UTP	FEP	Gray ThermoPlen®*	.230 5.84	34	51	C(UL)US CMP

Category 3

M53639 Non-Plenum	4 PAIR 24 AWG F/UTP	Thermoplastic	Gray PVC .210	5.33	29	43	C(UL)US CMR
M54708 Plenum	4 PAIR 24 AWG F/UTP	ThermoPlen®**	Gray ThermoPlen®*	.189 4.80	29	43	C(UL)US CMP

*Plenum rated Thermoplastic. For pair colors see chart A on page 64.

Jacket Colors for Category 5 4-Pair Non-Plenum

Jacket Color	Mohawk #	Jacket Color	Mohawk #
GRAY	M54783	BLACK	M57277
BLUE	M56912	ORANGE	M57564
GREEN	M57116	WHITE	M57662
RED	M56669	VIOLET	M57850

Jacket Colors for Category 5 4-Pair Plenum

Jacket Color	Mohawk #	Jacket Color	Mohawk #
GRAY	M55082	BLACK	M57269
BLUE	M57009	WHITE	M56760
GREEN	M56823	PINK	M58143
RED	M56809		

Custom colors available; please consult the factory.



Safety listed to NEC (NFPA 70)



Verified by ETL to TIA/EIA-568-B.2

